


Safety Policy

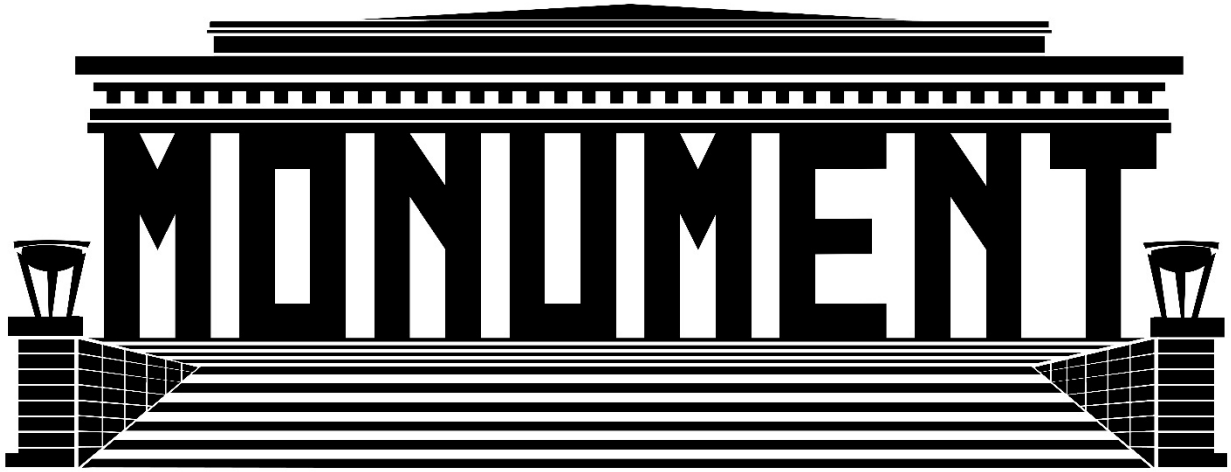

1910, 1926

Construction Safety Policy

Table of Contents

1. Objective
2. Policy
3. Applicability
4. Implementation
5. Administration
6. Reporting Injuries
7. Notifications
8. Basic Safety Rules
9. Enforcement of Safety Policy
10. Attachments
 - A. Job Safety Checklist
 - B. Safety Equipment Checklist
 - C. Safety Meeting Report
 - D. Employee Acknowledgment

Objective

The Safety Policy of Monument Construction is designed to comply with the Standards of the Occupational Safety and Health Administration, and to maintain a safe and injury/illness free workplace. A copy of the OSHA Safety and Health Standards 1926 and 1910 are available for all employees to use and reference. These Standards will be available in the home office at all times and will be sent to the jobsite on request.

Compliance with the following Safety Policy and all items contained therein is mandatory for all employees of the company. The authorization and responsibility for enforcement has been given primarily to the Project Manager. All management personnel share in this responsibility as well.

Policy

It is company policy that accident prevention be a prime concern of all employees. This includes the safety and well being of our employees, subcontractors, and customers, as well as the prevention of wasteful, inefficient operations, and damage to property and equipment.

Applicability

This Safety Policy applies to all employees of Monument Construction, regardless of position within the company. The Safety Rules contained herein apply to all subcontractors and anyone who is on a company project site. Every employee is expected to comply with the Safety Policy, as well as OSHA Health and Safety Standards

Implementation

This Safety Policy supports six fundamental means of maximum employee involvement:

1. Management commitment to safety.
2. Weekly tool box safety meetings at all jobsites.

3. Effective job safety training for all categories of employees.
4. Job hazard analysis provided to all employees.
5. Audio and/or visual safety presentations given at jobsites by Management.
6. Various incentive awards for exemplary safety performance.

Management will meet at least once a month to evaluate all areas of safety and health.

Administration

The Safety Policy will be carried out according to guidelines established and published in this and other related procedures. Specific instructions and assistance will be provided by Management as requested. Each supervisor will be responsible for meeting all of the requirements of the Safety Policy, and for maintaining an effective accident prevention effort within his or her area of responsibility. Each supervisor must also ensure that all accidents are thoroughly investigated and reported to Management on the same day of the occurrence.

Reporting of Injuries

All employees will be held accountable for filling out a "Notice of Injury Form" immediately after an injury occurs, even if medical treatment is not required. (Notice must be made at or near the time of the injury and on the same day of the injury.) Employees must report the injury to their supervisor/lead man/foreman/superintendent/project manager, etc. A casual mentioning of the injury will not be sufficient. Employees must let their supervisor know:

1. How they think they hurt themselves.
2. What they were doing at the time.
3. Who they were working with at the time.
4. When and where it happened.
5. Other pertinent information that will aid in the investigation of the incident.

Failure to report an injury immediately (meaning at or near the time of the injury and on the same day of the injury) is a violation of the Safety Policy, and may result in immediate disciplinary action, in accordance with company policy.

Notifications

1. In Case of Serious Injury or Death

After the injured has been taken to the hospital, the lead man/foreman/supervisor shall notify Management as soon as possible. Statements from witnesses shall be taken. Statements are to be signed by witnesses and should include the time and date. Photographs of the area where the incident occurred and any other relevant items are to be taken. Management will assist in the investigation. The completed accident report form will be sent to the warehouse office.

2. In Case of Inspection by OSHA

The lead man/foreman/supervisor must notify Management that an OSHA Inspector is on the jobsite. It is the responsibility of all employees to make the inspector's visit on the jobsite as pleasant and timely as possible.

Basic Safety Rules

1. Compliance with applicable federal, state, county, city, client, and company safety rules and regulations is a condition of employment.
2. All injuries, regardless of how minor, must be reported to your supervisor and the Warehouse Office immediately. An employee who fails to fill out a "Notice Of Injury Form" and send it to the Safety Office can be issued a safety violation notice and may be disciplined, in accordance with company policy. In the event of an accident involving personal injury or damage to property, all persons involved in any way will be required to submit to drug testing.
3. Hard hats will be worn by all employees on the project site at all times when required. The bill of the hard hat will be worn in front at all times. Alterations or modifications of the hat or liner are prohibited. Crane operators, when in an enclosed cab, have the option of not wearing a hard hat due to the possible obstruction of view.
4. Safety glasses will be worn when performing the following: grinding, jack hammering, utilizing compressed air, cutting, glass handling, or working in an area where these activities are performed. Additional eye and face protection such as mono-goggles and face shields are required for such operations handling chemicals, acids and caustics. Burning goggles burning or brazing and welding hoods for welding, etc., are required.
5. Fall Protection Requirements (See Monument Fall Protection Program)

- a. Full body harnesses and lanyards shall be worn and secured any time there is a fall hazard of more than six (6) feet.
 - b. Lifelines shall be erected to provide fall protection where work is required in areas where permanent protection is not in place. Horizontal lifelines shall be a minimum of 2-inch diameter wire rope. Vertical lifelines shall be 3/4 inch manila rope or equivalent and shall be used in conjunction with an approved rope grab.
 - c. Structural steel erectors are required to "hook up" with full body harness and lanyard.
 - d. Employees using lanyards to access the work or position themselves on a wall or column, etc., must use an additional safety lanyard for fall protection.
 - e. Manlifts must be used properly. As soon as an employee enters an articulating boom lift and before the lift is started, the employee must put on the harness and attach the lanyard to the lift. Employees are not required to wear harnesses on scissor lifts.
6. Clothing must provide adequate protection to the body. Shirts must have at least a tee sleeve. Shirts with sleeves and long pants will be worn at all times. No shorts are to be worn on projects. Burners and welders will not be permitted to wear polyester or nylon clothing. Sturdy work boots with rigid, slip resistant soles are required. No clogs, tennis shoes or loafers are permitted. Steel-toed tennis shoes with the ANSI label are the only alternative to the leather work boot.
 7. All personnel will be required to attend safety meetings as stipulated by project requirements and management in order to meet OSHA Safety Standards.
 8. Firearms, alcoholic beverages or illegal drugs are not allowed on company property or in company vehicles at any time. When drugs are prescribed by a physician, Management must be informed. The use or possession of illegal drugs or alcoholic beverages on the jobsite will result in immediate termination.
 9. Housekeeping shall be an integral part of every job. Supervisors\foremen\lead men and employees are responsible for keeping their work areas clean and hazard-free. Clean up is required when a job is finished at the end of the day.
 10. All tools whether company or personal, must be in good working condition. Defective tools will not be used. Examples of defective tools include chisels with mushroomed heads, hammers with loose or split handles, guards missing on saws or grinders, etc.
 11. All extension cords, drop cords, and electrical tools shall be checked, properly grounded with ground fault interrupters (GFI's), and color-coded by a designated competent person each month. This shall be part of the

assured grounding program. Cords and equipment that do not meet requirements shall be immediately tagged and removed from service until repairs have been made.

12. "Horseplay" on the jobsite is strictly prohibited. Running on the jobsite is allowed only in extreme emergencies.
13. No employee is permitted to ride in the bed of a truck standing up or sitting on the outside edges of a truck. Employees must be sitting down inside the truck or truck bed when the vehicle is in motion. Riding as a passenger on equipment is prohibited unless the equipment has the safe capacity for transporting personnel.
14. Adequate precautions must be taken to protect employees and equipment from hot work such as welding or burning. Fire extinguishing equipment shall be no further than 50 feet away from all hot work. Used fire extinguishers must be returned to the Warehouse to be recharged immediately. Use of welding blinds is required in high traffic areas.
15. All scaffolding and work platforms must be built and maintained in accordance with OSHA specifications. All ladders must be in safe condition without broken rungs or split side rails. Damaged ladders will be removed from service. Ladders will be secured at the top and bottom and extend three (3) feet past the working surface. Metal ladders around electrical work are prohibited. Ladders will be used as they are designed and only for that purpose.
16. Compressed air will not be used to dust off hands, face or clothing.
17. Report all unsafe conditions and near accidents to Responsible Person so corrective action can be taken.
18. All floor openings or excavations shall be barricaded on all sides to ensure employees are aware of the hazards. Floor holes shall be covered, with the covers secured and clearly marked.
19. All OSHA Safety Standards will be followed for job processes requiring respiratory protection. (SEE RESPIRATORY PROTECTION PROGRAM)
20. All OSHA Safety Standards will be followed for job processes requiring fall protection. (SEE FALL PROTECTION PROGRAM).
21. All OSHA Safety Standards concerning confined space entry will be followed. (SEE CONFINED SPACE PROGRAM).
22. All OSHA Safety Standards concerning lockout/tagout of energized equipment will be followed. (SEE LOCKOUT/TAGOUT PROGRAM).

Enforcement of Safety Policy

Safety violation notice(s) will be issued to any employee, subcontractor, or anyone on the jobsite violating the safety rules or regulations by Management.

1. Any violation of safety rules can result in suspension or immediate termination.
2. Any employee receiving three (3) written general violations within a six (6) month period will be terminated.
3. Issuance of a safety violation notice for failure to use fall protection or for failure to report a job injury (at the time of the injury) may result in disciplinary action including termination, in accordance with company policy.

It is understood that Monument Construction is not restricting itself to the above rules and regulations. Additional rules and regulations as dictated by the job will be issued and posted as needed.

ATTACHMENT A

JOB SAFETY CHECKLIST

The following Job Safety Checklist has been condensed and edited from the Occupational Safety and Health Act, Part 1926, Construction Safety and Health Regulations.

Safety Rules

- _____ Hard hats and safety glasses worn.
- _____ Shirts with sleeves worn.
- _____ Work shoes worn.
- _____ Subcontractors' personnel hold safety meetings as indicated by project requirements in accordance with OSHA
- _____ Work areas safe and clean.
- _____ Safety mono-goggles/face shields worn when circumstances warrant.
- _____ Electrical cords and equipment properly grounded with GFI's in place and checked by a competent person.
- _____ No use of alcoholic beverages or controlled substances.
- _____ Subcontractors provide fall protection for their employees in accordance with OSHA Safety Standards.
- _____ All scaffolds built to specifications as established by OSHA.
- _____ Excavation/trenches sloped or shored as established by OSHA.
- _____ Drug testing of employees involved in accident(s) resulting in personal injury or property damage.

Recordkeeping

- _____ OSHA poster "Safety and Health Protection on the Job" posted.
- _____ OSHA " 200 Log or Occupational Injuries and Illnesses" posted during the month of February only.
- _____ Hard hat sign posted in a conspicuous manner.
- _____ Weekly safety meeting sign-in logs maintained in a folder with a copy forwarded to the main office weekly.

Housekeeping and Sanitation

- _____ General neatness.
- _____ Regular disposal of trash.
- _____ Passageways, driveways, and walkways clear.
- _____ Adequate lighting.
- _____ Oil and grease removed.
- _____ Waste containers provided and used.
- _____ Adequate supply of drinking water.
- _____ Sanitary facilities adequate and clean.
- _____ Adequate ventilation.

First Aid

- _____ First aid stations with supplies and equipment. Inspected monthly, expired supplies discarded.
- _____ Trained first aid personnel.

_____ Injuries promptly and properly reported.

Personal Protective Equipment

_____ Hard hats.

_____ Hearing protection.

_____ Eye and face protection.

_____ Respiratory protection.

_____ Fall protection.

Fire Protection

_____ Fire extinguishers charged and identified.

_____ A No Smoking@ signs posted.

_____ Flammable and combustible material storage area.

_____ Fuel containers labeled.

Hand and Power Tools

_____ Tools inspected.

_____ Power tools properly guarded.

_____ Safety guards in place.

Welding & Cutting

_____ Compressed gas cylinders secured in vertical position.

_____ Hoses inspected.

_____ Cylinders, caps, valves, couplings, regulators, and hoses free of oil and grease.

_____ Caps on cylinders in storage in place.

_____ Flash back arresters in place.

_____ Welding screens in place.

_____ Fuel and oxygen cylinders separated in storage.

Electrical

_____ All portable tools and cords properly grounded [Ground Fault Interrupters (GFI=s) properly installed].

_____ Daily visual inspection of caps, ends and cords for deformed or missing pins, insulation damage.

_____ Tests of cords, tools and equipment for continuity and correct attachment of the equipment grounding connector (GFI) to the proper terminal made every month and:

1. Prior to first use.
2. Prior to return to service after repairs.
3. Prior to return to service after incident that may have caused damage to cord or equipment.

_____ Cords and equipment not meeting requirements immediately tagged and removed from service until repairs have been made.

Ladders

_____ Inspected at regular intervals.

_____ No broken or missing rungs or steps.

_____ No broken or split side rail.

_____ Extend at least 36 inches above landing and be secured.

_____ Side rails of 2 x 4 up to 16 feet, or 3 x 6 over 16 feet.

Scaffolding

_____ Inspected at regular intervals.

_____ Footings are a sound ridge and capable of carrying maximum intended load.

_____ Tied into building vertically and horizontally at 14 foot intervals.

_____ Properly cross-braced.

_____ Proper guardrails and toe boards.

_____ Scaffold planks capable of supporting at least four (4) times the maximum intended load.

_____ No unstable objects such as concrete blocks, boxes, etc., used as scaffold foundations.

_____ Use of OSHA Scaffold Tagging Program.

Guardrails, Handrails and Covers

_____ Guardrails, handrails and covers installed wherever there is danger of employees or materials falling through floors, roofs or wall openings and shall be guarded on all exposed sides.

_____ Posts at least 2 x 4 stock and spaced no more than eight (8) feet apart.

_____ Top rail 42 inches above the floor and of 1 x 4 stock.

_____ Intermediate rail 21 inches above the floor and of 1 x 4 stock.

_____ Guardrail assemblies around floor openings equipped with toe boards. Toe boards at least four (4) inches above the floor level with no more than 1/4 inch clearance above the floor level, when there are employees below or when conditions dictate.

_____ Hole covers permanently attached to the floor or structure and identified with a hole cover sign stenciled with the word "Danger". Hole covers for holes two (2) inches or greater in diameter made of at least 3/4 inch plywood or heavier.

M. Material Hoists

_____ Inspected at regular intervals.

_____ Operating rules posted at operators station.

_____ "No Rider" signs prominently posted at all stations.

_____ All entrances properly protected.

_____ All entrance bars and gates painted with diagonal contrasting stripes.

_____ Experienced operators.

_____ Current crane certification inspection sticker and papers on the rig.

Motor Vehicles

_____ Lights, brakes, tires, horn, etc., inspected at regular intervals.

_____ No overloaded vehicles.

_____ Trash trucks have covers.

_____ No riding on the edge of pickup truck beds.

_____ No riding on concrete trucks, loaders, backhoes, etc.

_____ Functioning back-up alarms on loaders, tractors, backhoes, etc.

_____ Fire extinguishers installed and readily available.

_____ Seat belts worn at all times.

Material Storage and Handling

_____ Material at least two (2) feet from edge of excavation site.

_____ Proper temperature and moisture levels for safe storage of materials to prevent deterioration or volatile hazards within the storage area.

_____ Inventory maintained and inspected frequently.

_____ Proper protective gear worn when handling chemicals.

Concrete, Concrete Forms and Shoring

_____ Full body harnesses as positioning devices for employees tying rebar greater than six (6) feet above adjacent working surface have

_____ Automatic shut-off switches on trowel machines.

_____ No riding on concrete buckets or flying forms.

_____ All forms properly shored.

_____ Single post shores braced horizontally.

Use of Cranes and Derricks

_____ Prohibition of the use of cranes or derricks to hoist employees on a personal platform except in the situation where no safe alternative is possible.